



CENTOR Easy Digital force gauge



Centor Easy

Complete gauge for tests in production

The **CENTOR Easy** force gauges are designed to meet the production needs of its users. This group offers several features which are indispensable today for Quality Control, for example: ease of reading with its large backlit graphical display, RS232 output, memory of the last 100 values and ability to set thresholds with visual and sound alarms.

Its highly efficient measurement chain enables it to use a sampling rate of 1,000 Hertz with a resolution of 1/10,000 FS and a total error of less than 0.1% FS.

A statistics feature is available on the Centor

EASY models: the average and standard deviation of the current batch are calculated and displayed after each measurement. All the values of the production batch are kept in the memory and can be sent to a computer by RS232. The operator is spared any data entry, knows his results in real time and saves everything at the end of the tests.

The entirely configurable RS232 output sends the data to a PC. A digimatic output can be used with a printer for statistics.

Designed for use in an industrial environment, it is an ideal tool for tests during production.

Specifications

FEATURES	CENTOR EASY
Accuracy	0,1 % PE
Resolution	1/10 000 PE
Display peak and current reading in the same time	√
Units	N, Lb, Kg, g, Oz
Bargraph	√
Sampling rate	1 000 Hertz
Tare	√
Auto-off	Adjustable from 5 to 15 minutes
Force limit	√
Average and standard deviation	√
Low battery indicator	√
Peak in tension and compression	√
Memory for setup	√
RS232 output	Send current reading, peak or minimum
Fast charge	√
Reversible display	√
Digimatic output	√
Analogic output	+/- 1 V
TTL input and output	√
Backlit display	√
Sensor protected from overloads up to 200% of its capacity	√
Operates on rechargeable batteries	√
Operation without recharging	8 hours
Metal casing	√
Protective elastomer overmould	√
Certificate of calibration included	√
Power supply	110V / 220V

Statistics

Statistics feature with automatic calculation of the average and standard deviation on the 100 values in the memory.

MES / ECH	3
OPER	01
Unite	N
STATS	MXI
Nbech	002
Moy	12.33
001	12.334
001	12.332
001	12.331
002	12.335
002	12.334
002	12.330

Option - Softwares

Caligraph software compatible: Data acquisition and analysis of curves with real time graphing thru RS232 or USB.

RSIC software compatible : Download your results to Microsoft Excel using your RS232 comport.

Models and capacities

MODELS	CAPACITIES	ACCURACY	RESOLUTIONS
CNR EA 10	2 lb	0.002 lb	0.0002 lb
CNR EA 25	5 lb	0.005 lb	0.0005 lb
CNR EA 50	10 lb	0.01 lb	0.001 lb
CNR EA 100	20 lb	0.02 lb	0.002 lb
CNR EA 250	50 lb	0.05 lb	0.005 lb
CNR EA 500	100 lb	0.1 lb	0.01 lb
CNR EA 1000	200 lb	0.2 lb	0.02 lb

CENTOR Easy Digital force gauge


COM-TEN
INDUSTRIES



Display indicator and keypad



Dimensions

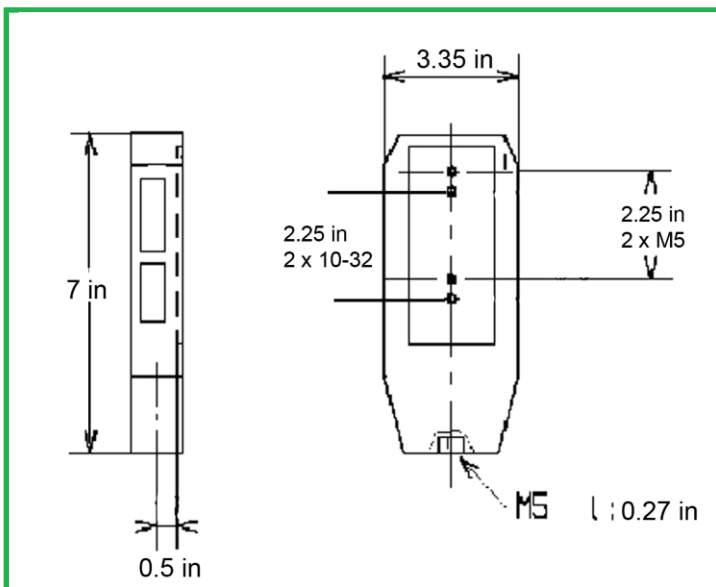

Accessories

Our force gauges are delivered in a carrying case with power supply, certificate of calibration and accessories (hook, plate diameter 3/4 in, rod)



COM-TEN
INDUSTRIES



Certified ISO
9001:2008

COM-TEN Industries
6405 49th Street North
Pinellas Park, FL, 33781 - USA
sales@com-ten.com • www.com-ten.com
Tel. : +1 727-520-1200 • Fax : +1 727-520-0299